

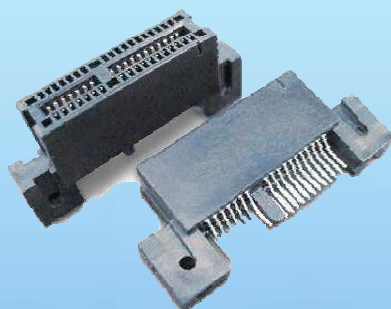


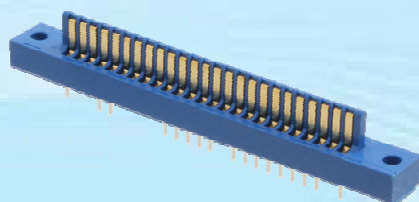

因为专业，所以信赖
Because Professional, So Trust

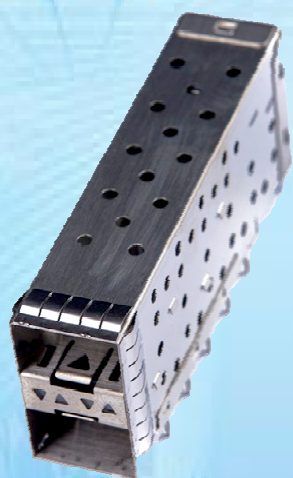

29Pin SAS Connector SMT+T/H Type

◆ PART NO.


HD81-029X10R-0001

Plated: 1-Gold Flash
7-0.38μm Au
3-0.76μm Au


Packing: R-Reel
T-Tray

◆ SPECIFICATIONS

Rated Current: 1.5AMP
Rated Voltage: 100V AC
Insulation Resistance: 500MΩ Min.
Contact Resistance: 30mΩ Max.
Withstand Voltage: AC 500V
Operating Temperature: -45℃ To +85℃
Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Copper Alloy
Terminal Plating: Au Plating On Contact Area
Durability: 300 Cycles
Packing: Reel

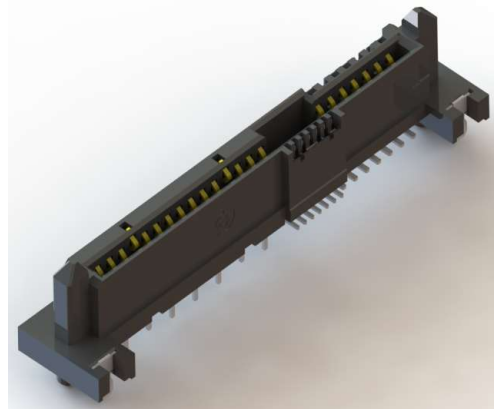

◆ DRAWING

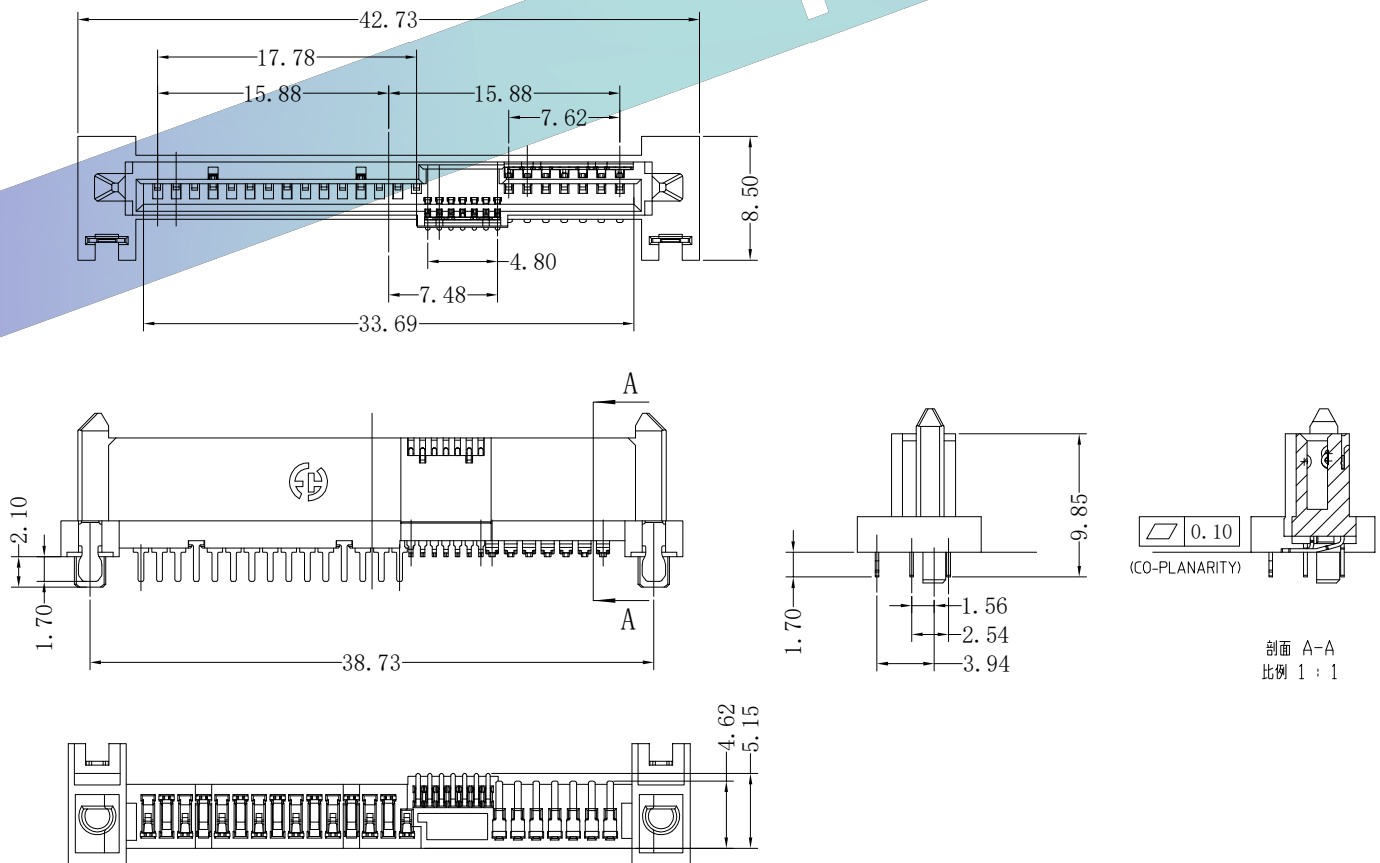

288Pin 0.8mm Pitch DDR4 Connector T/H Type

◆ PART NO.

1500-MXXX-0071

Tail Length
1-2.67mm
4-2.40mm
0-3.18mm
2-2.10mm

Housing Color

- 1-Black Housing&White Ejector
- 2-Black Housing&Black Ejector
- 3-White Housing&White Ejector
- 4-Blue Housing&White Ejector
- 5-Blue Housing&Blue Ejector

Plated:
1-Gold Flash
7-0.38μm Au
3-0.76μm Au




◆ SPECIFICATIONS

Rated Current:	0.75AMP
Rated Voltage:	5 V AC
Insulation Resistance:	1000MΩ Min.
Contact Resistance:	10mΩ Max.
Withstand Voltage:	AC 300V
Operating Temperature:	-45℃ To +85℃
Insulator Material:	PA
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	25 Cycles
Packing:	Tray

DRAWING

PART NUMBER	DIM. A TAIL LENGTH	DIM. B BOARDLOCK LENGTH	PCB THICKNESS
1500-*2**-0072	1.10 ± 0.25	3.78 ± 0.25	1.60
1500-*4**-0073	1.40 ± 0.25	3.78 ± 0.25	1.60
1500-*1**-0071	1.67 ± 0.25	3.78 ± 0.25	1.60
1500-*0**-0073	1.18 ± 0.25	4.57 ± 0.25	2.36

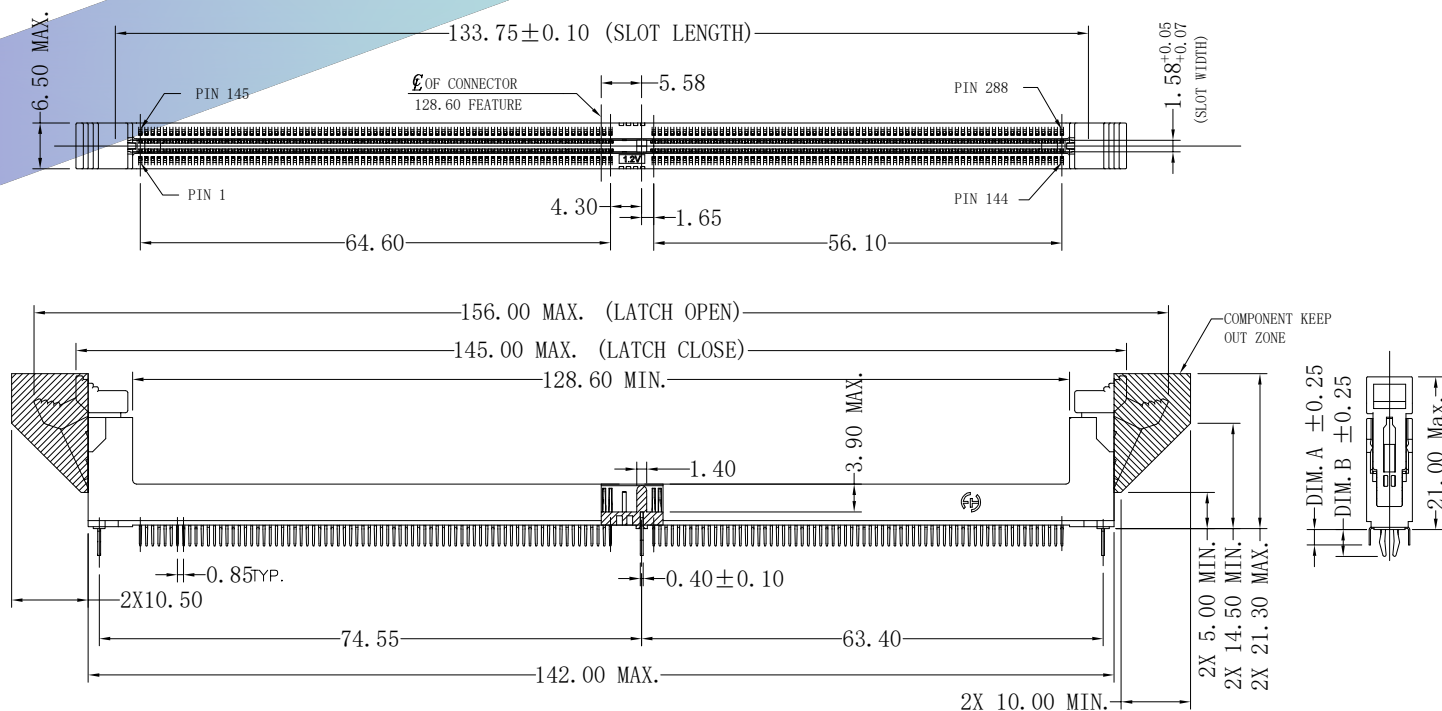


50Pin CF Card Connector SMT Type

◆ PART NO.

1500-0001-0026


Plated:
1-0.38 μm Au
3-0.76 μm Au
5-1.27 μm Au

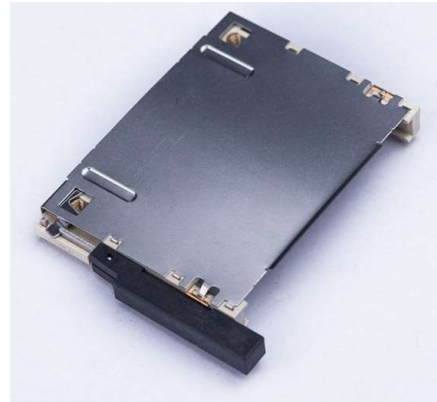

◆ SPECIFICATIONS

Rated Current:	0.5AMP
Rated Voltage:	30V AC
Insulation Resistance:	1000M Ω Min.
Contact Resistance:	40m Ω Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-45 $^{\circ}\text{C}$ To +85 $^{\circ}\text{C}$
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	10000 Cycles
Packing:	Tray

◆ DRAWING

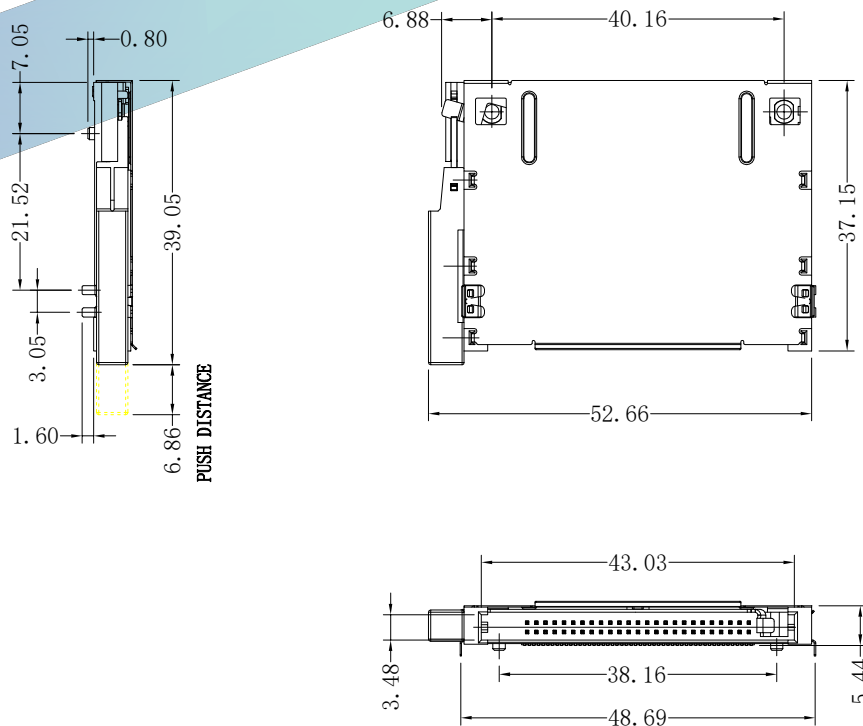

4.2mm Pitch Mini Fit Press Fit Type


◆ PART NO.

1500-00XX-0068




Total Pins No.
4-4Pin
6-6Pin
:
24-24Pin

◆ SPECIFICATIONS

Rated Current:	6AMP
Rated Voltage:	600V AC
Insulation Resistance:	1000MΩ Min.
Contact Resistance:	10mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-45℃ To +105℃
Insulator Material:	Black PA
Terminal Material:	Copper Alloy
Terminal Plating:	Tin Plating Overall
Durability:	300 Cycles
Packing:	Tray

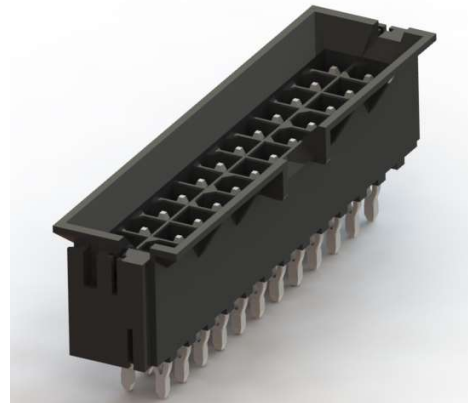

◆ DRAWING

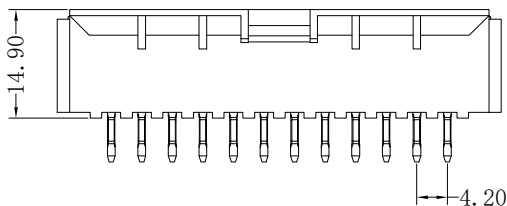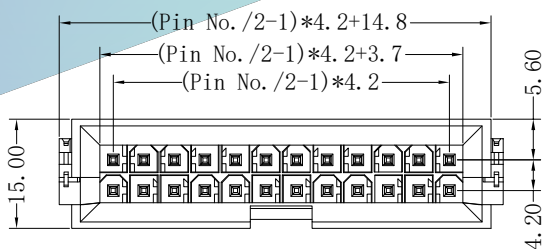

4.2mm Pitch Mini Fit T/H Type

◆ PART NO.

P W 0 1 - X X X X 1 0 T - 0 0 8 1

Total Pins No.

4-4Pin

6-6Pin

:

24-24Pin

Plated:

1-Gold Flash

7-0.38 μ m Au




3-0.76 μ m Au

8-2.54 μ m Tin

◆ SPECIFICATIONS

Rated Current:	6AMP
Rated Voltage:	600V AC
Insulation Resistance:	1000M Ω Min.
Contact Resistance:	10m Ω Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-45 $^{\circ}$ C To +105 $^{\circ}$ C
Insulator Material:	Black PA
Terminal Material:	Copper Alloy
Terminal Plating:	Au Or Tin Plating On Contact Area
Durability:	300 Cycles
Packing:	Tray

◆ DRAWING

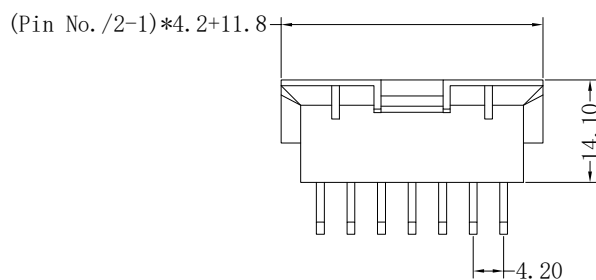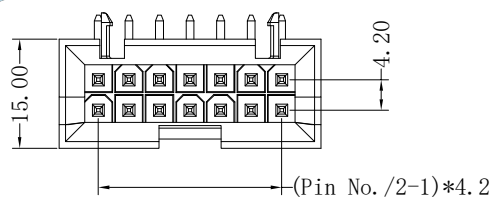

FuHao

0.80mm Pitch STB 9 Edge Card SMT Type


◆ PART NO.

1 5 0 0 - 0 X X X - 0 0 3 5


Total Pins No.
20-20Pin
40-40Pin
:
120-120Pin

◆ SPECIFICATIONS


Rated Current: 1.2AMP
Rated Voltage: 250V AC
Insulation Resistance: 500MΩ Min.
Contact Resistance: 30mΩ Max.
Withstand Voltage: AC 500V
Operating Temperature: -55℃ To +125℃
Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Copper Alloy
Terminal Plating: 0.76μm Au Plating On Contact Area
Durability: 50 Cycles
Packing: Reel

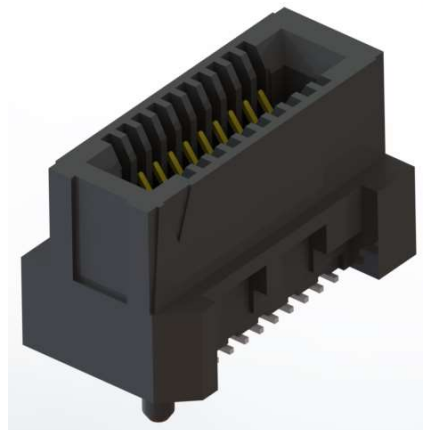

◆ DRAWING

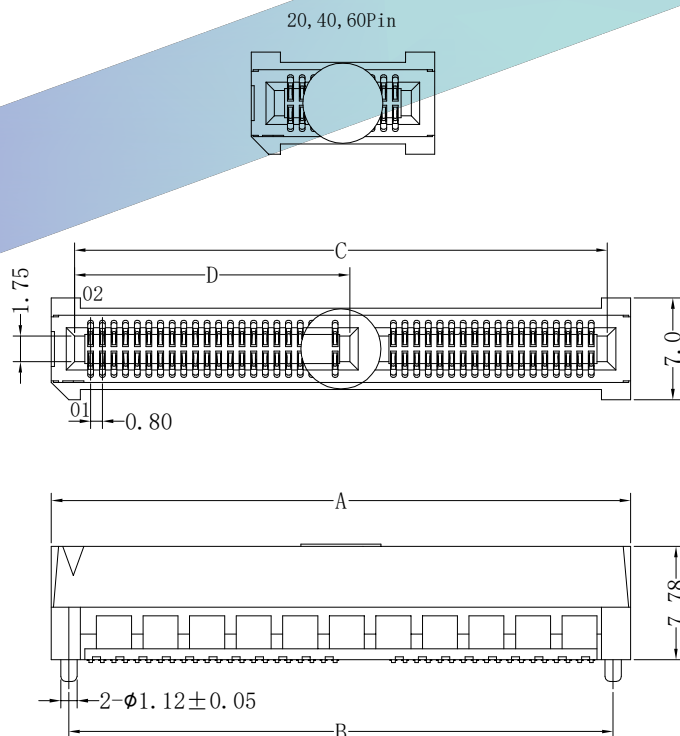

Total Pin No.	A	B	C	D
20	12.6	10.2	9.4	/
40	20.6	18.2	17.4	/
60	28.6	26.2	25.4	/
26	18.2	15.8	15	6.1
50	26.2	25.4	24.6	6.1
74	37.4	35	34.2	18.1
80	39.8	37.4	36.6	18.9
98	47.0	44.6	43.8	22.9
100	47.8	45.4	44.6	22.9
120	55.8	53.4	52.6	26.9

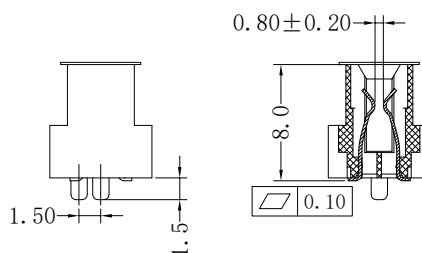

0.80mm Pitch SFP+ 20Pin Connector

◆ PART NO.


1500-000X-0042

Plated:
1-Gold Flash
7-0.38μm Au
3-0.76μm Au

◆ SPECIFICATIONS

Rated Current:	0.5AMP
Rated Voltage:	120V AC
Insulation Resistance:	1000MΩ Min.
Contact Resistance:	35mΩ Max.
Withstand Voltage:	AC 300V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	100 Cycles
Packing:	Reel

◆ DRAWING

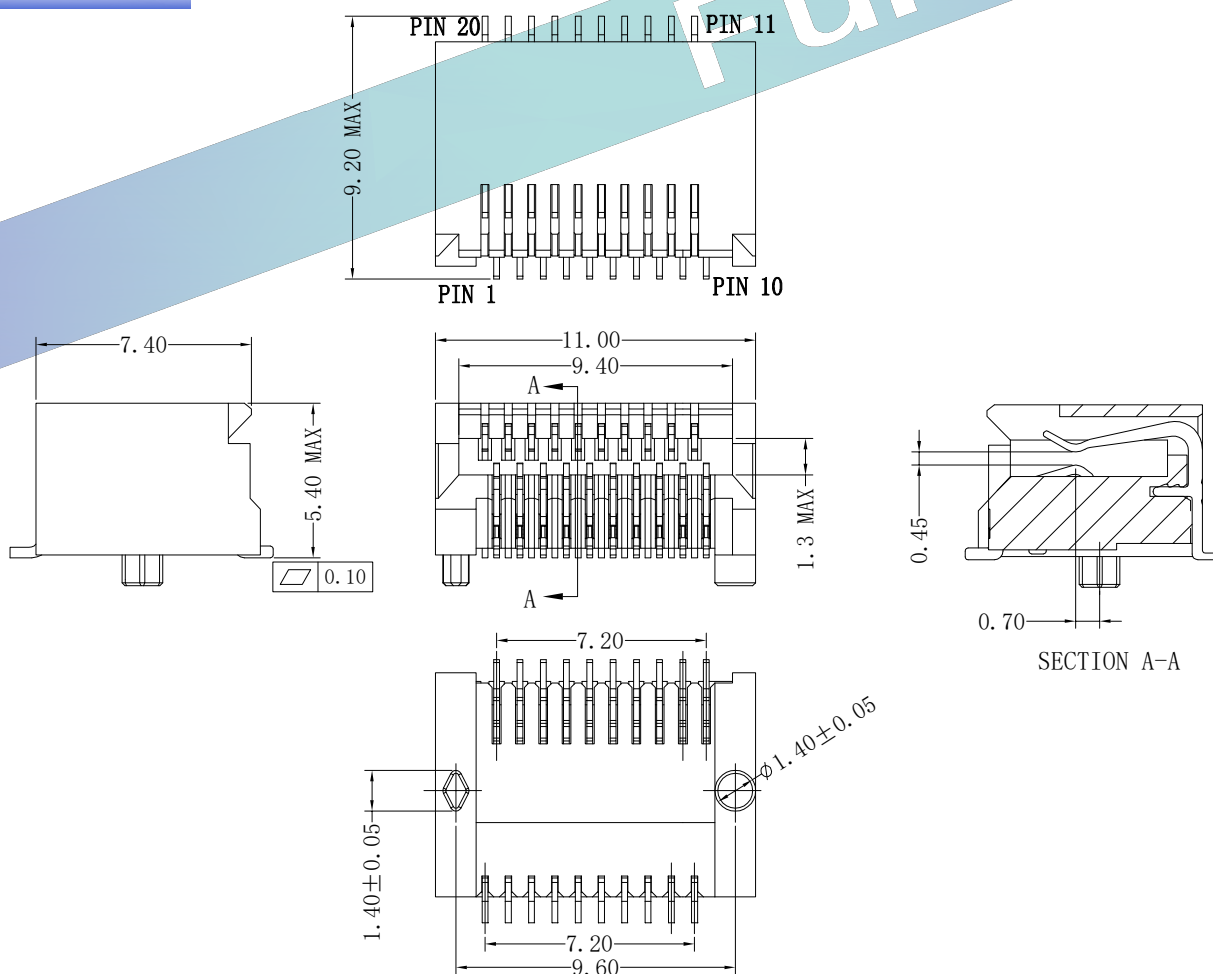

0.80mm Pitch SFP 70Pin Connector

◆ PART NO.





SF-0701X2-H001

◆ SPECIFICATIONS

Rated Current:	0.5AMP	Plated: 1-Gold Flash 7-0.38μm Au 3-0.76μm Au
Rated Voltage:	120V AC	
Insulation Resistance:	1000MΩ Min.	
Contact Resistance:	35mΩ Max.	
Withstand Voltage:	AC 300V	
Operating Temperature:	-40℃ To +85℃	
Insulator Material:	Black Liquid Crystal Polymer	
Terminal Material:	Copper Alloy	
Terminal Plating:	Au Plating On Contact Area	
Durability:	50 Cycles	
Packing:	Reel	



◆ DRAWING

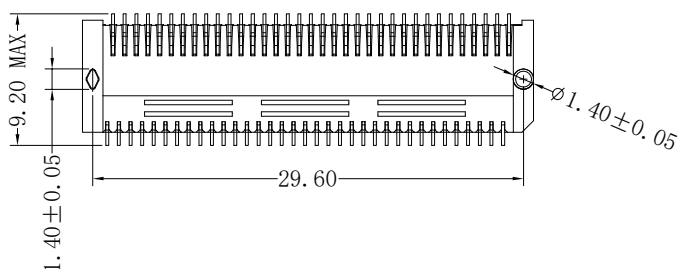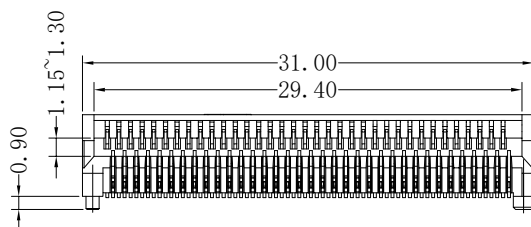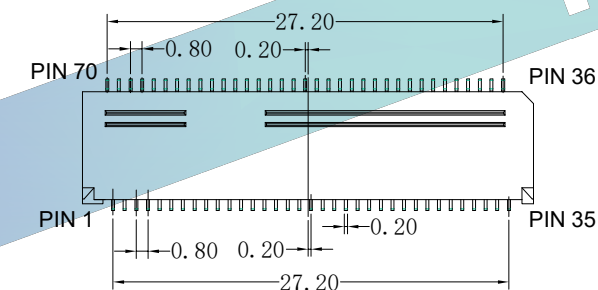

0.80mm Pitch Edge Card Connector SMT Type

◆ PART NO.

EC81-XXXX10R-0005

Total Pins No.

20-20Pin

40-40Pin

:


120-120Pin

Plated:

1-Gold Flash

7-0.38μm Au

3-0.76μm Au



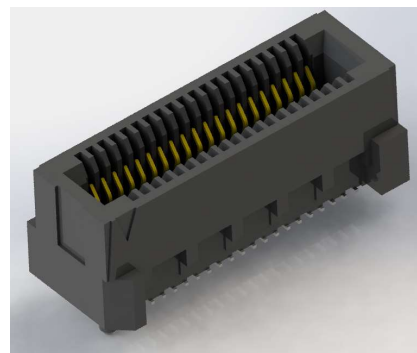


◆ SPECIFICATIONS


Rated Current:	1.2AMP
Rated Voltage:	250V AC
Insulation Resistance:	500MΩ Min.
Contact Resistance:	30mΩ Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	0.76μm Au Plating On Contact Area
Durability:	50 Cycles
Packing:	Reel

◆ DRAWING

20, 40, 60Pin

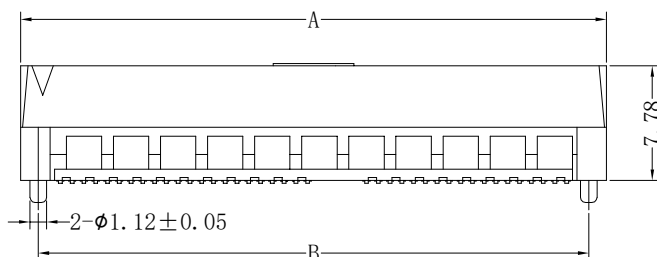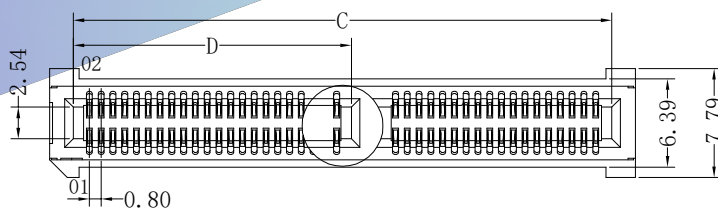

Total Pin No.	A	B	C	D
20	12.6	10.2	9.4	/
40	20.6	18.2	17.4	/
60	28.6	26.2	25.4	/
26	18.2	15.8	15	6.1
50	26.2	25.4	24.6	6.1
74	37.4	35	34.2	18.1
80	39.8	37.4	36.6	18.9
98	47.0	44.6	43.8	22.9
100	47.8	45.4	44.6	22.9
120	55.8	53.4	52.6	26.9



2.00mm Pitch MEC2 Edge Card Connector SMT Type


◆ PART NO.

1 5 0 0 - 0 X X X - 0 0 4 0


Total Pins No.
10-20Pin
16-16Pin
:
100-100Pin

◆ SPECIFICATIONS




Rated Current: 1.2AMP
Rated Voltage: 250V AC
Insulation Resistance: 500MΩ Min.
Contact Resistance: 30mΩ Max.
Withstand Voltage: AC 500V
Operating Temperature: - 55℃ To + 125℃
Insulator Material: White Liquid Crystal Polymer
Terminal Material: Copper Alloy
Terminal Plating: 0.76μm Au Plating On Contact Area
Durability: 50 Cycles
Packing: Reel

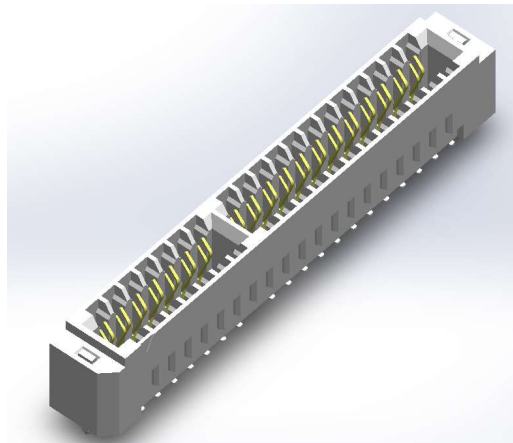

◆ DRAWING

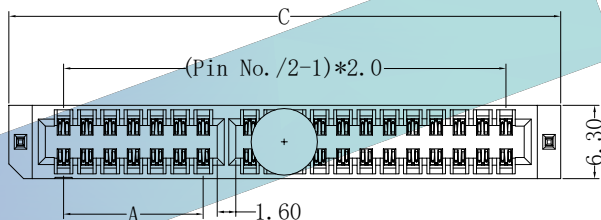

Total Pin No.	A	B	C	D
10	NA	11.5	17.4	15.4
16	2	17.5	23.4	21.4
40	12	41.5	47.4	45.4
60	18	61.5	67.4	65.4
80	28	81.5	87.4	85.4
100	38	101.5	107.4	105.4

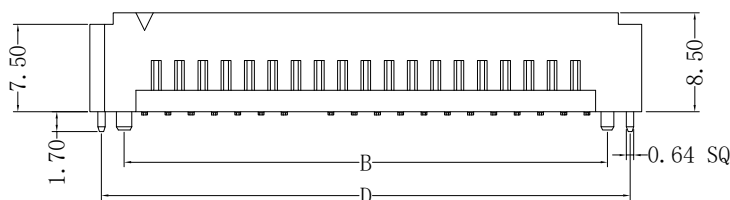

2.0mm Pitch Header Pin T/H Type


◆ PART NO.

HE 23 - XXXX 10 T - 0080




Total Pins No.	Plated:
4-4Pin	1-Gold Flash
6-6Pin	7-0.38μm PdNi
:	3-0.76μm PdNi
80-80Pin	

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	200 Cycles
Packing:	Tray

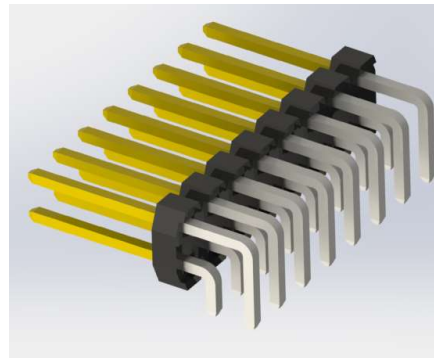

◆ DRAWING

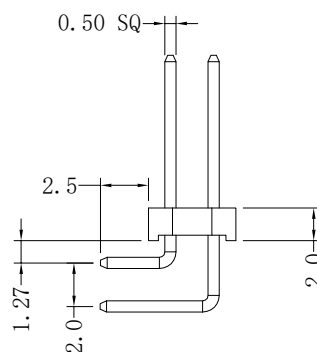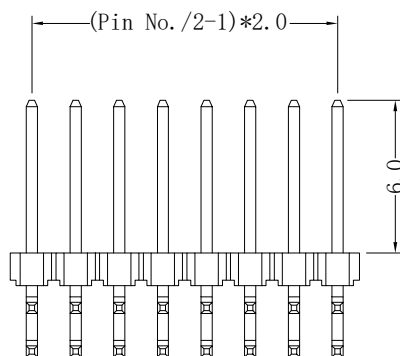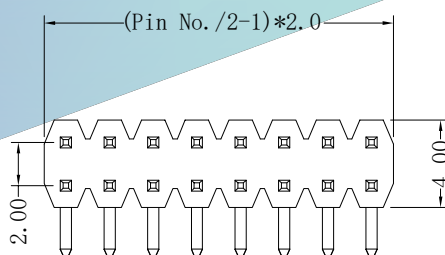

2.0mm Pitch Header Pin With Box SMT Type

◆ PART NO.

HE24-XXXX10R-0014




Total Pins No.	Plated:
4-4Pin	1-Gold Flash
6-6Pin	7-0.38μm PdNi
:	3-0.76μm PdNi
80-80Pin	



◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	200 Cycles
Packing:	Reel

◆ DRAWING

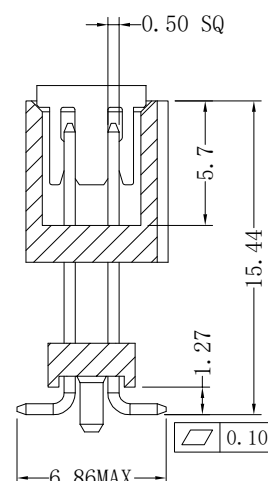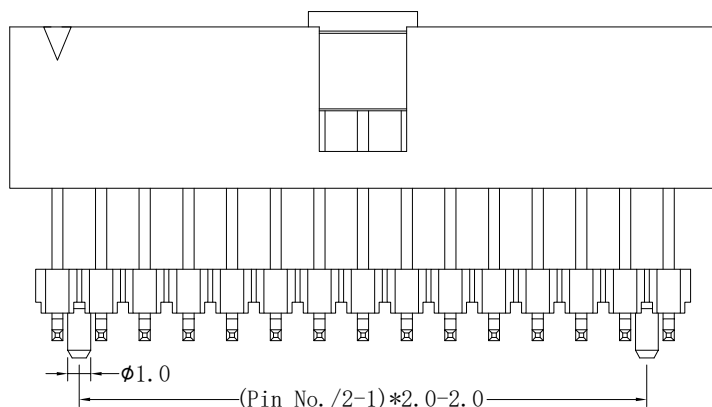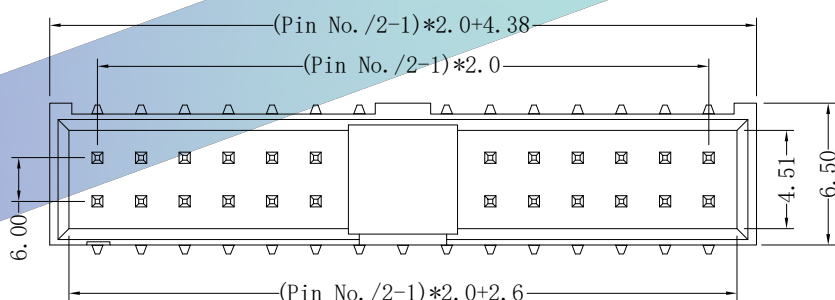

2.0mm Pitch Header Pin

◆ PART NO.

HE 24 - XXXX 10 - 2007




Total Pins No.	Plated:
4-4Pin	1-Gold Flash
6-6Pin	7-0.38μm PdNi
:	3-0.76μm PdNi
80-80Pin	

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	200 Cycles
Packing:	Tray



◆ DRAWING

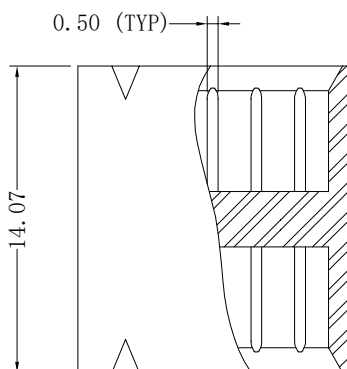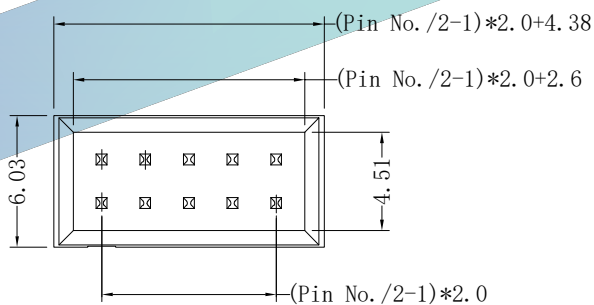


2.0mm Pitch Header Pin

◆ PART NO.

H E 2 3 - X X X X 1 0 X - 0130



Total Pins No.	Plated:	Packaging:
4-4Pin	1-Gold Flash	T-Tray(withour cap)
8-8Pin	7-0.38μm PdNi	R-Taper Reel(with cap)
:	3-0.76μm PdNi	
80-80Pin		

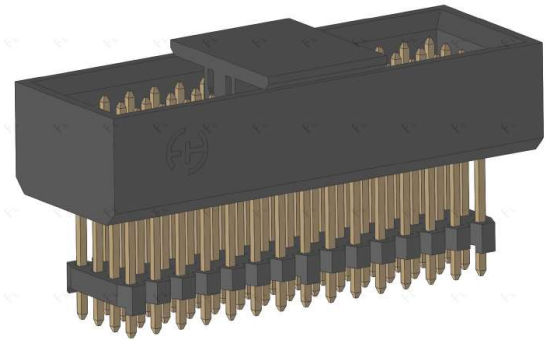

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	200 Cycles
Packing:	Tray or Taper Reel

◆ DRAWING

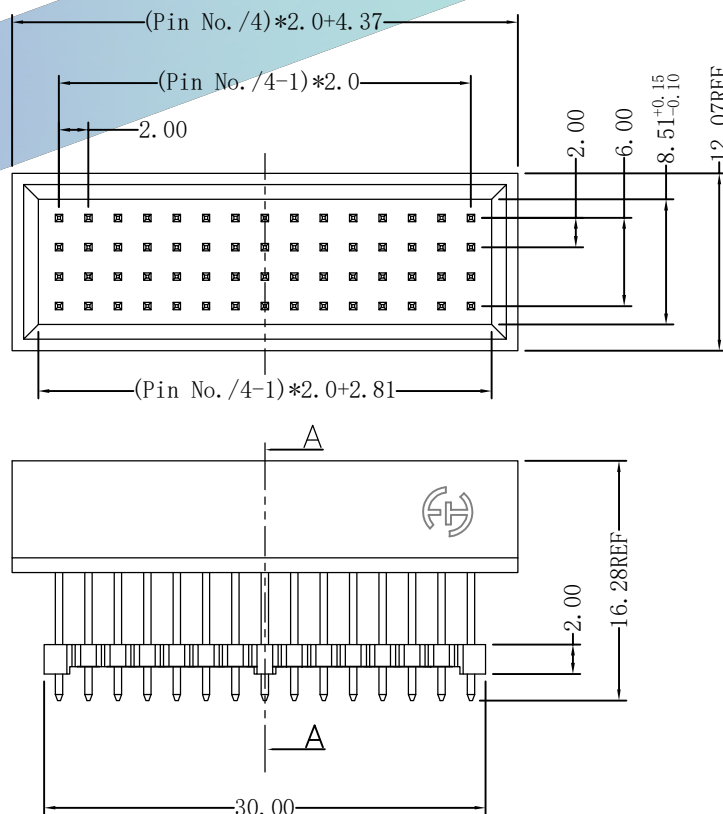

2.0mm Pitch Header Pin

◆ PART NO.

HE26-XXXX10T-0117

Total Pins No.

4-4Pin

8-8Pin

:


80-80Pin

Plated:

1-Gold Flash

7-0.38μm PdNi


3-0.76μm PdNi

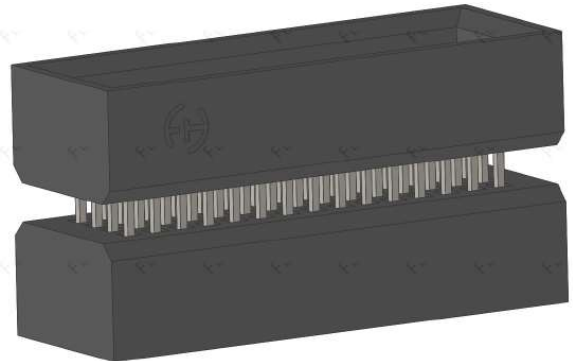

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	200 Cycles
Packing:	Tray

◆ DRAWING

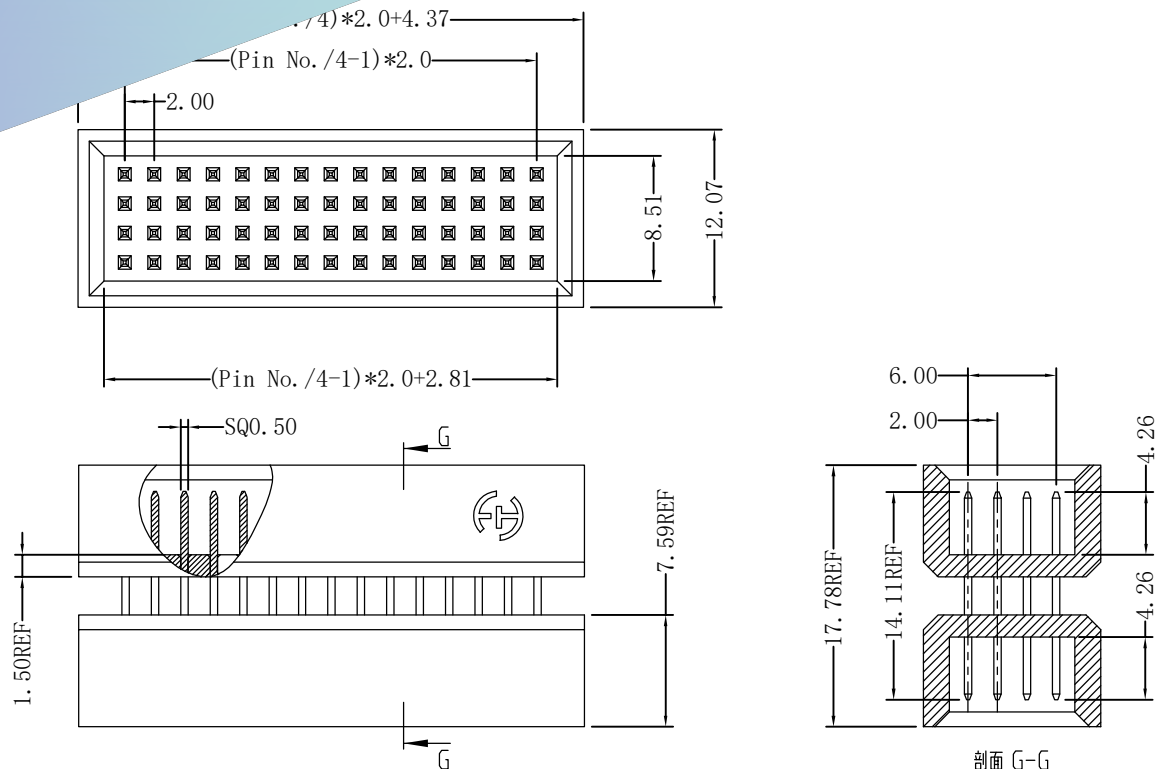

2.54mm Pitch Header Pin T/H Type


◆ PART NO.

HE 43 - XXXX 10 T - 0079




Total Pins No.	Plated:
4-4Pin	1-Gold Flash
6-6Pin	7-0.38μm PdNi
:	3-0.76μm PdNi
80-80Pin	

◆ SPECIFICATIONS

Rated Current:	4.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	200 Cycles
Packing:	Tray

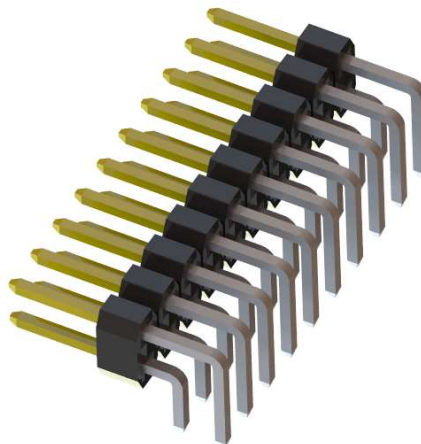

◆ DRAWING

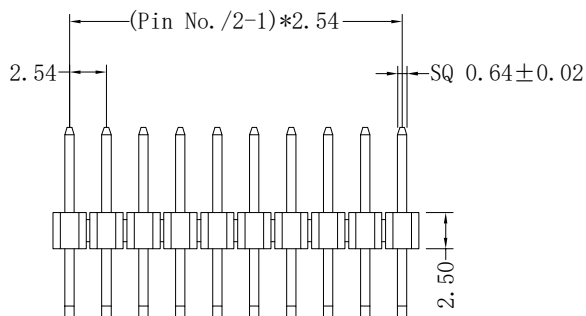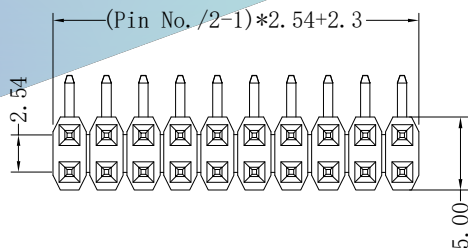

1.25mm Pitch Header

◆ PART NO.

FH91 - X X X X 2 0 R - 0001

Total Pins No.

4-4Pin

8-8Pin


:

50-50Pin

Plated:

7-0.38μm Au




3-0.76μm Au

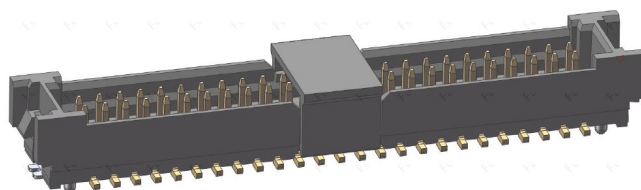

◆ SPECIFICATIONS

Rated Current:	3.2AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Nylon 9T
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	500 Cycles
Packing:	Tape Reel

◆ DRAWING

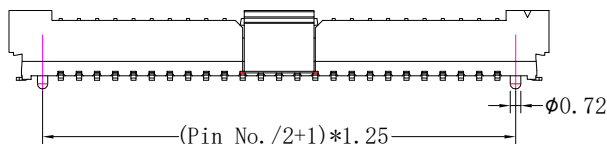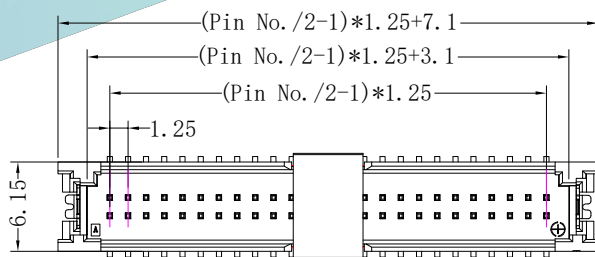


2.0mm Pitch Female Header T/H Type

◆ PART NO.

FH23-XXXX10R-0078

Total Pins No.
4-4Pin
6-6Pin
:
80-80Pin




Plated:
1-Gold Flash
7-0.38μm Au
3-0.76μm Au

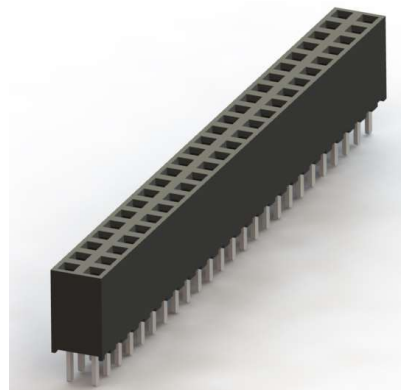

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	250 Cycles
Packing:	Reel

◆ DRAWING

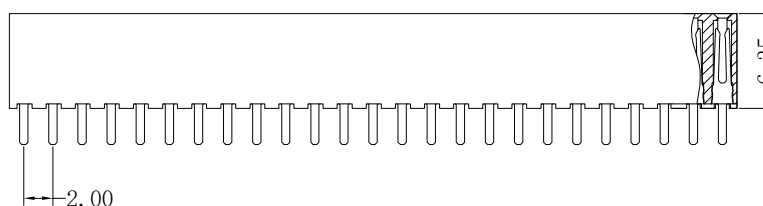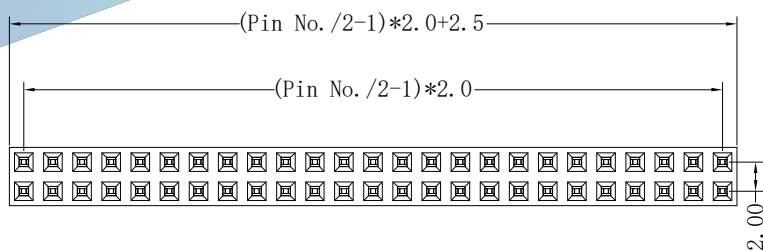


2.0mm Pitch Female Header SMT Type

◆ PART NO.

F H 2 2 - X X X X 1 0 - 0 0 1 5

Total Pins No.
4-4Pin
6-6Pin
:
80-80Pin




Plated:
1-Gold Flash
7-0.38μm PdNi
3-0.76μm PdNi

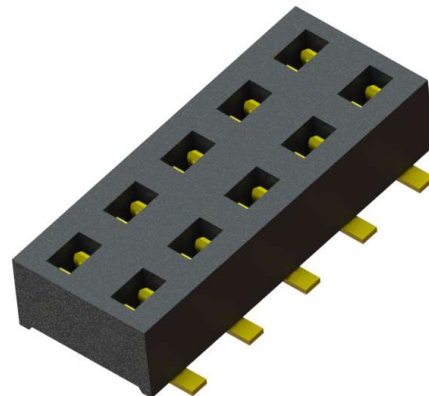

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	PdNi Plating On Contact Area
Durability:	250 Cycles
Packing:	Reel

◆ DRAWING

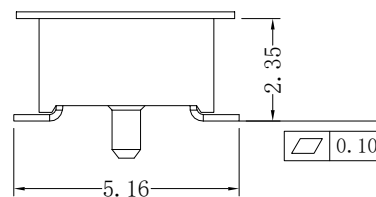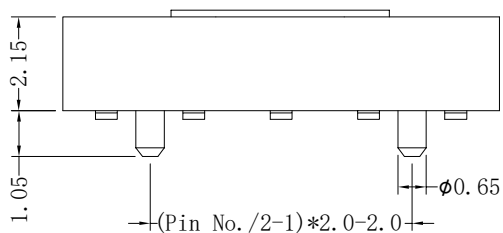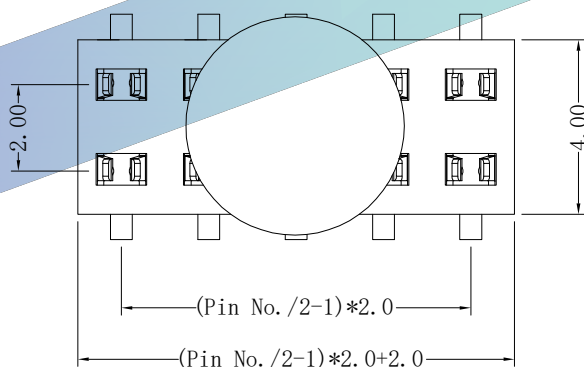

2.0mm Pitch Female Header

◆ PART NO.

FH23 - X X X X 1 0 R - 0001

Total Pins No.

4-4Pin

8-8Pin

:


80-80Pin

Plated:

1-Gold Flash

7-0.38μm Au




3-0.76μm Au

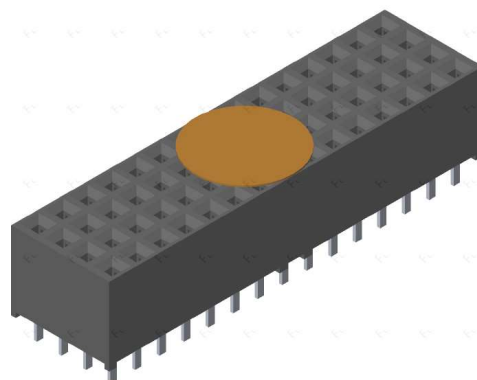

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	250 Cycles
Packing:	Tape Reel

◆ DRAWING

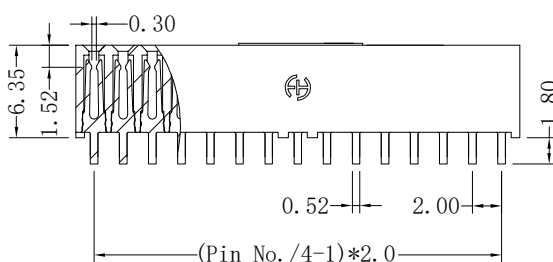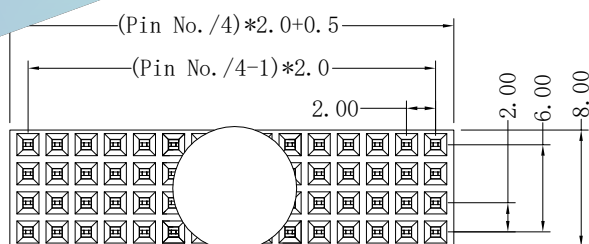


2.54mm Pitch Female Header T/H Type

◆ PART NO.

FH43-XXXX10T-0075

Total Pins No.
4-4Pin
6-6Pin
:
80-80Pin



Plated:
1-Gold Flash
7-0.38μm Au
3-0.76μm Au

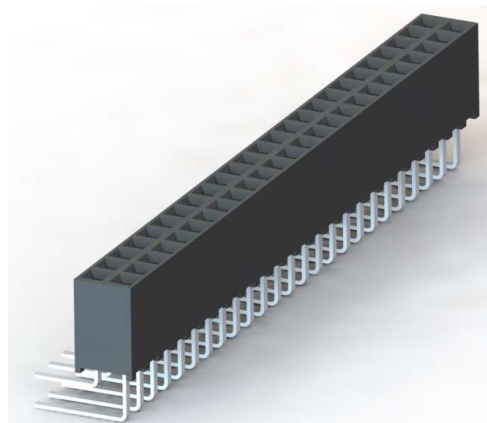

◆ SPECIFICATIONS

Rated Current:	4.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	250 Cycles
Packing:	Tray

◆ DRAWING

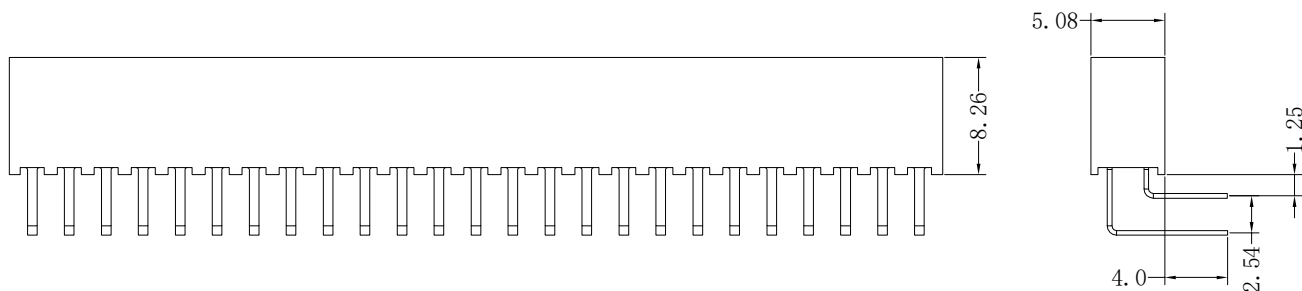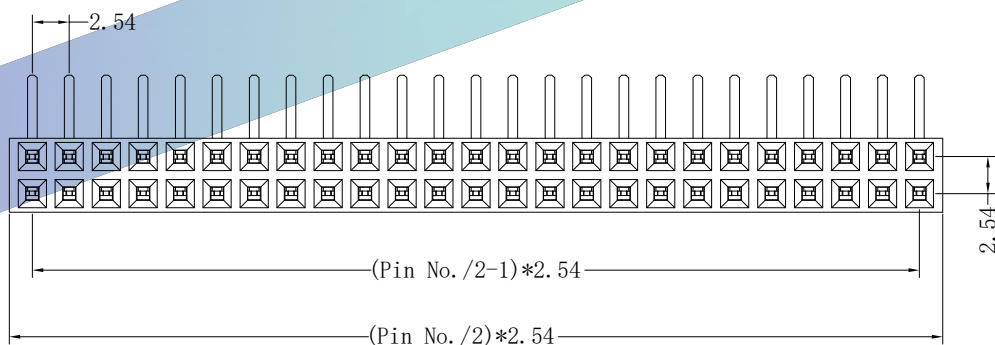


1.27mm Pitch Socket SMT Type

◆ PART NO.

FH72-XXXX10R-0010

Total Pins No.
20-20Pin
40-40Pin
:
120-120Pin




Plated:
1-Gold Flash
2-0.25μm Au
3-0.76μm Au

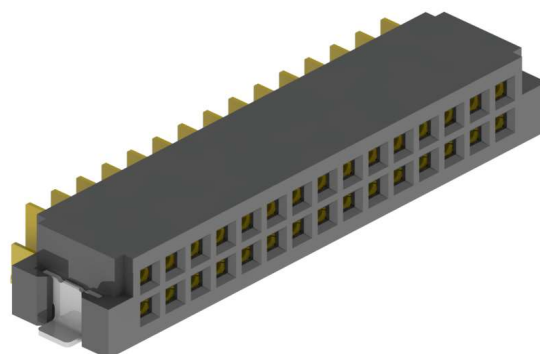

◆ SPECIFICATIONS

Rated Current:	3.0AMP
Rated Voltage:	500V AC
Insulation Resistance:	10000MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 1500V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	250 Cycles
Packing:	Reel

◆ DRAWING

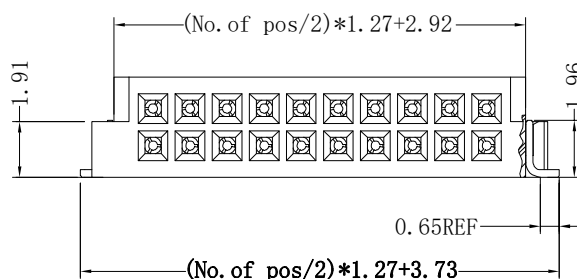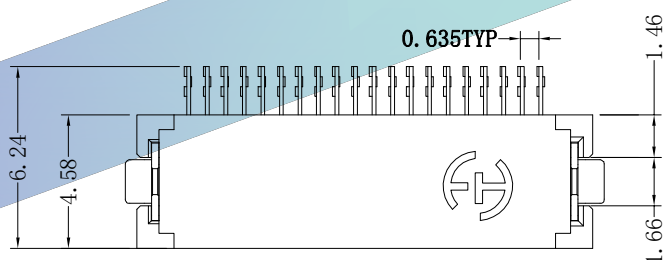


0.50mm Pitch BTB Connector SMT Type

◆ PART NO.

BT 51 - XXXX10R - 0006

Total Pins No.
20-20Pin
40-40Pin
:
120-120Pin


Plated:
1-Gold Flash
2-0.25μm Au
3-0.76μm Au

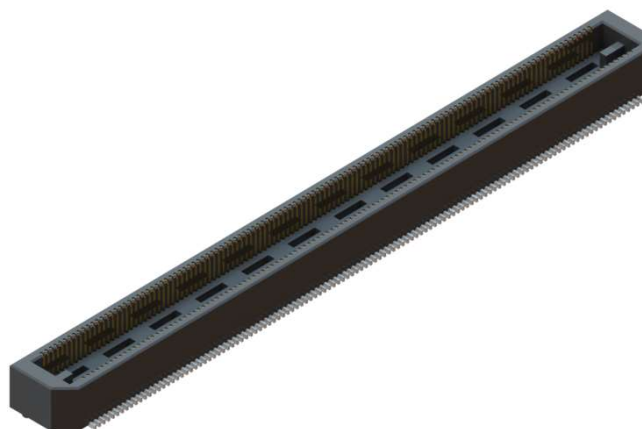

◆ SPECIFICATIONS

Rated Current:	1.25AMP
Rated Voltage:	120V AC
Insulation Resistance:	500MΩ Min.
Contact Resistance:	30mΩ Max.
Withstand Voltage:	AC 300V
Operating Temperature:	-55℃ To +125℃
Insulator Material:	Black Liquid Crystal Polymer
Terminal Material:	Copper Alloy
Terminal Plating:	Au Plating On Contact Area
Durability:	100 Cycles
Packing:	Reel

DRAWING

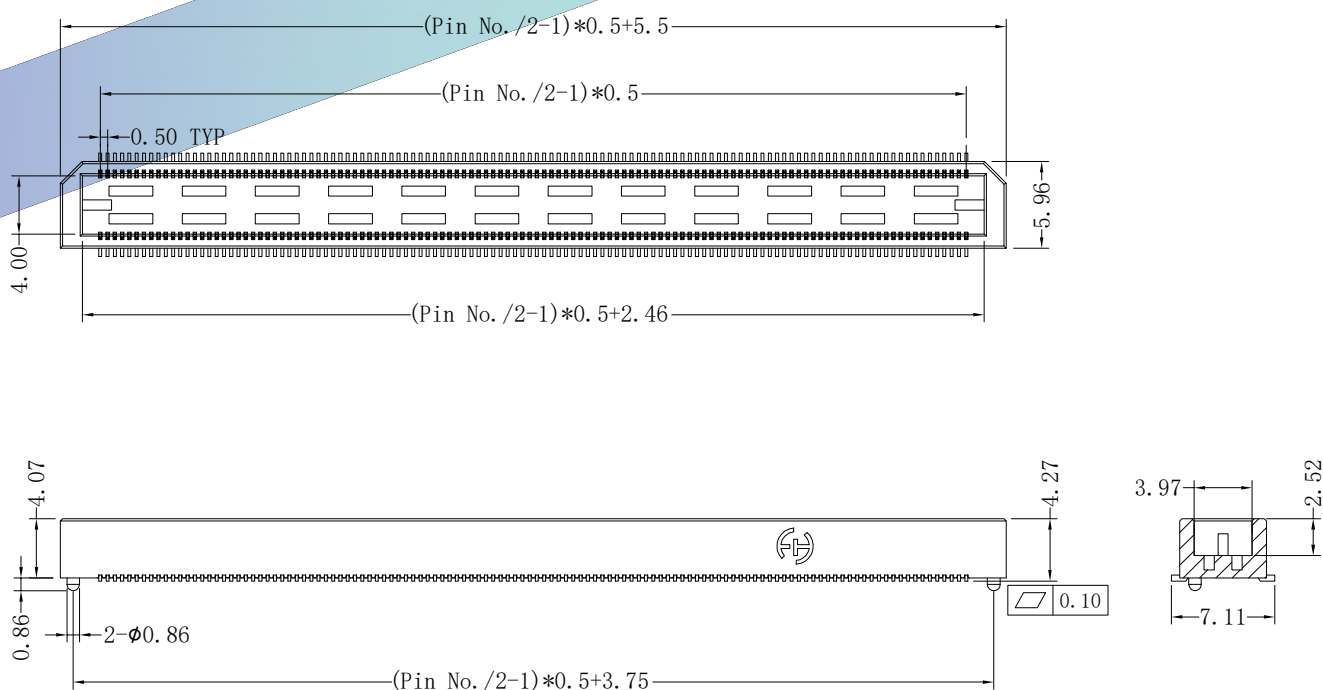

SFP 1X4 Cage Press Fit Type

◆ PART NO.

1500-0001-0001

◆ SPECIFICATIONS

Rated Current:

Rated Voltage:

Insulation Resistance:

Contact Resistance:

Withstand Voltage:

Operating Temperature: -55℃ To +125℃

Cage Material: C7701





Cage Plating: No

Durability: 100 Cycles

Packing: Tray



◆ DRAWING

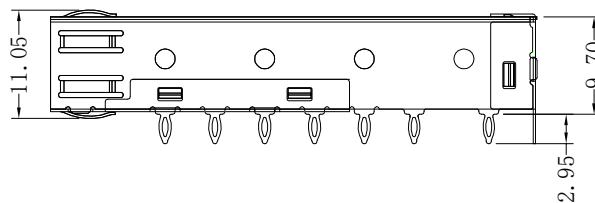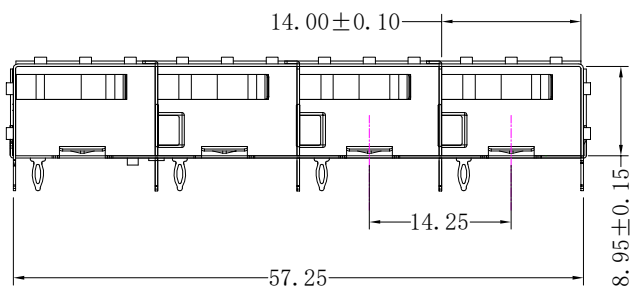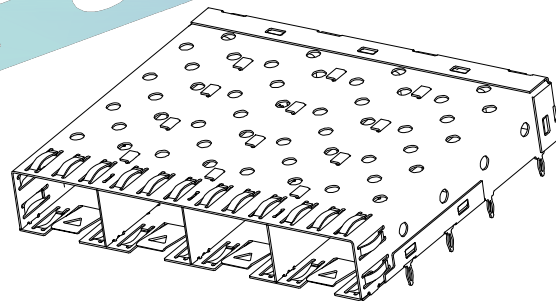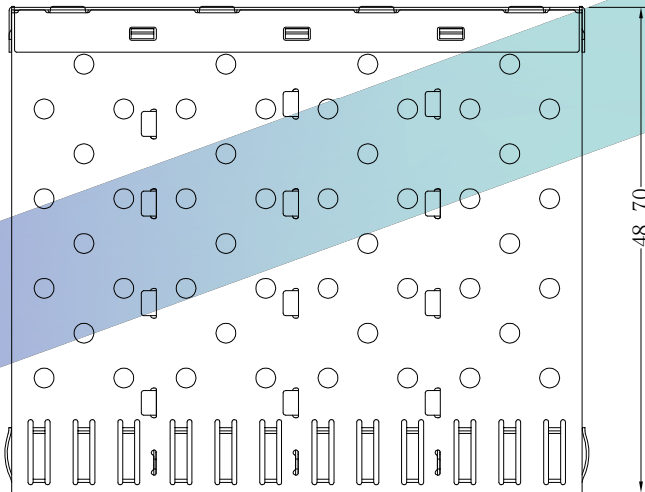


SFP+ 1X4 Cage Press Fit Type

◆ PART NO.





SF-000301-H002

◆ SPECIFICATIONS

Rated Current:	
Rated Voltage:	
Insulation Resistance:	
Contact Resistance:	
Withstand Voltage:	
Operating Temperature:	-55℃ To +125℃
Cage Material:	C7701
Emi Spring Material:	C7701
Cage Plating:	No
Emi Spring Plating:	No
Durability:	100 Cycles
Packing:	Tray

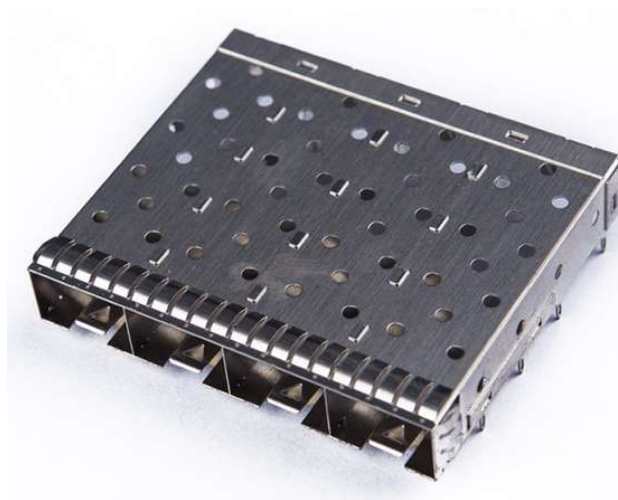

◆ DRAWING

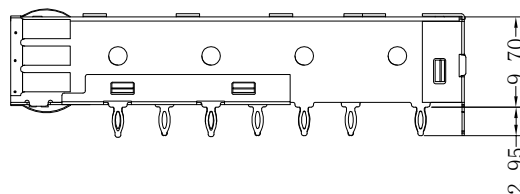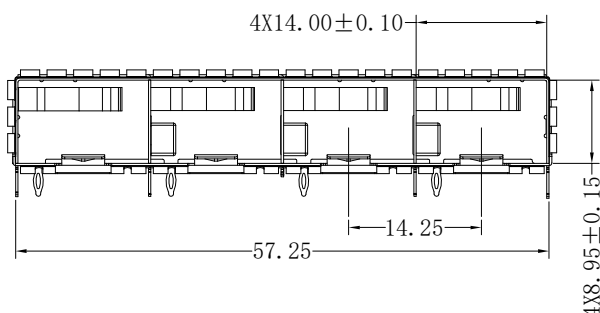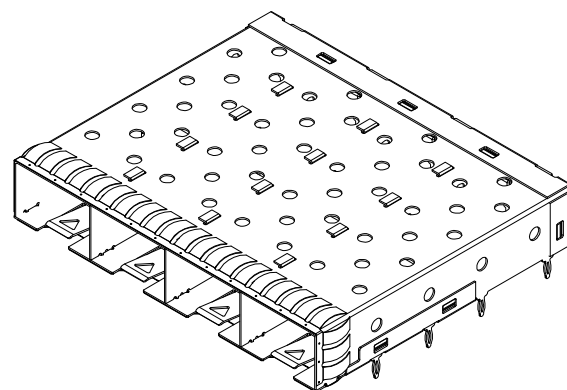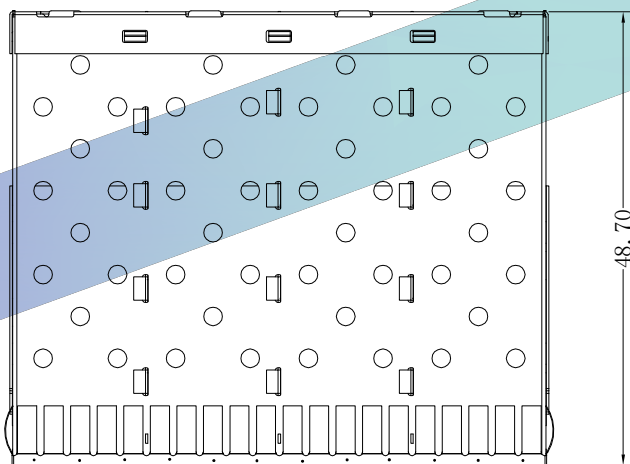

SFP+ 2XN Connector


◆ PART NO.

1 7 0 0 - 0 X 3 X - 0 0 2 8


- | | |
|---------------------------------|------------|
| 0- Without Light Pipes | 1-SFP+ 2X1 |
| 1- With Inner Light Pipes | 2-SFP+ 2X2 |
| 2- With Outer Light Pipes | 4-SFP+ 2X4 |
| 3- With Inner/Outer Light Pipes | 6-SFP+ 2X6 |
| | 8-SFP+ 2X8 |

◆ SPECIFICATIONS

- Rated Current:** 0.5AMP
Rated Voltage: 120V AC
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 40mΩ Max.
Withstand Voltage: AC 300V
Operating Temperature: - 40℃ To +85℃
Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Copper Alloy
Terminal Plating: 0.76μm Au Plating On Contact Area
Durability: 100 Cycles
Packing: Tray

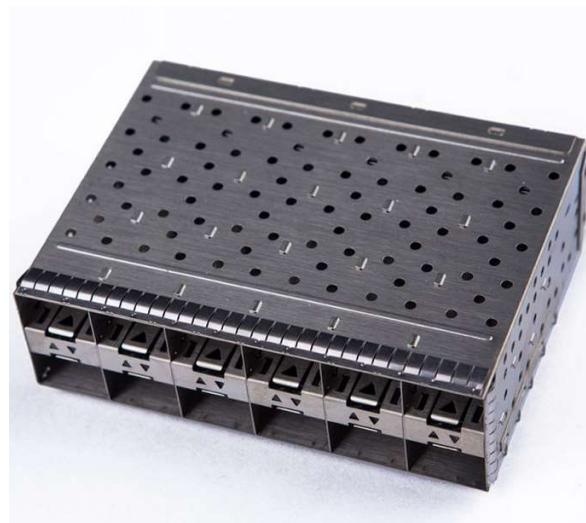

◆ DRAWING

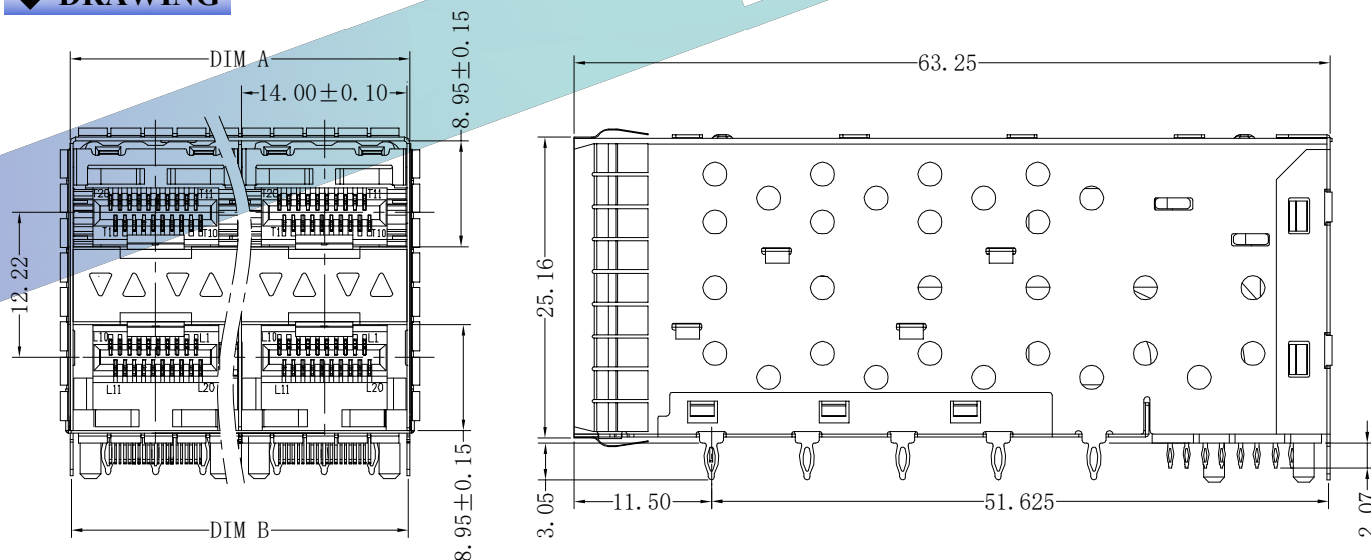

PRODUCT NAME	DIM A	DIM B
SFP+ 2X1	14.50	14.25
SFP+ 2X2	28.75	28.50
SFP+ 2X4	57.25	57.00
SFP+ 2X6	85.75	85.50
SFP+ 2X8	114.25	114.00

QSFP 1X1 Cage Solder Type

◆ PART NO.

1700-000X-0053


◆ SPECIFICATIONS

Rated Current:	
Rated Voltage:	
Insulation Resistance:	
Contact Resistance:	
Withstand Voltage:	
Operating Temperature:	-55℃ To +125℃
Cage Material:	C7701
Emi Spring Material:	Beryllium Bronze
Cage Plating:	No
Emi Spring Plating:	Ni Plating Overall
Durability:	250 Cycles
Packing:	Reel

1-Solder Type
2-Press Fit Type



◆ DRAWING

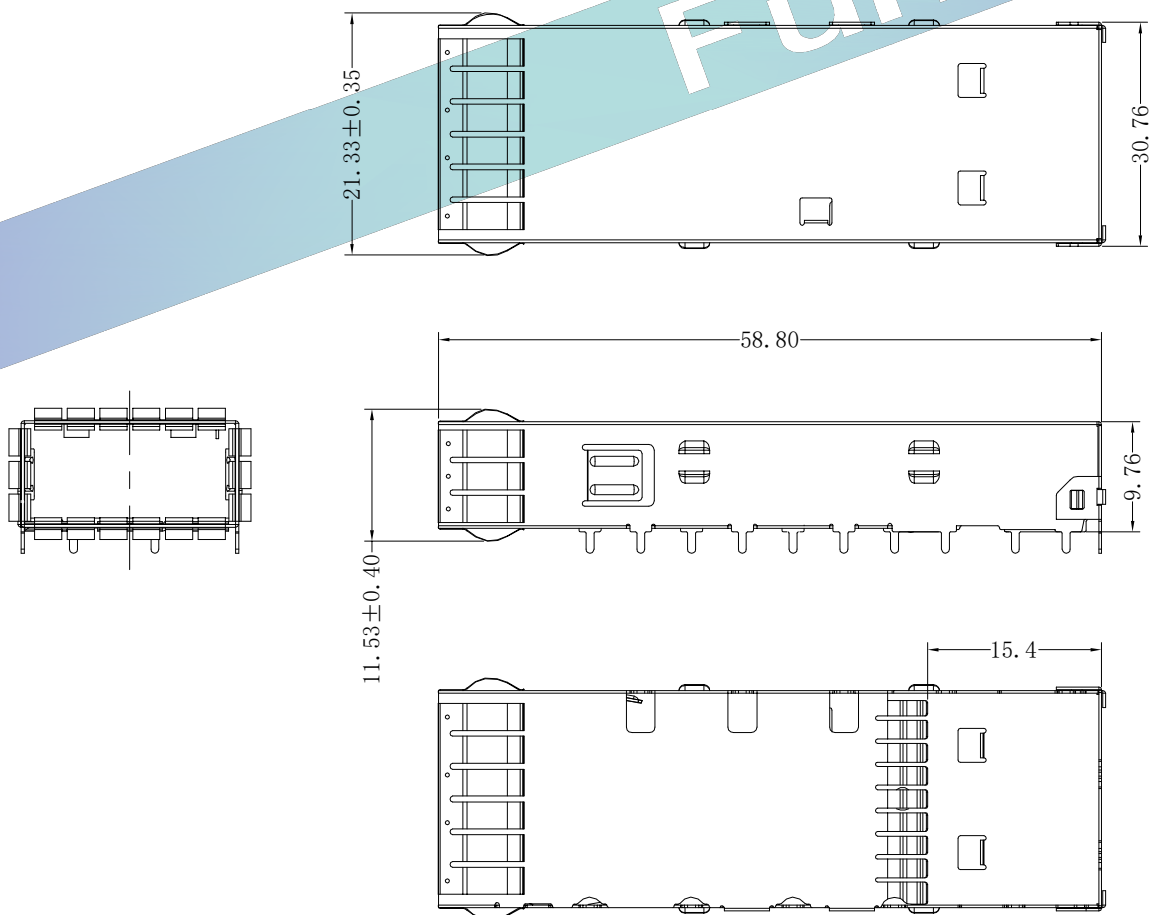

1. 25mm W/B S/T CONN

◆ PART NO.

WB91 - X X X 8 1 0 R - 0002

Total Pins No.

2-4Pin

3-8Pin


:

7-10Pin

Plated:

1-Gold Flash



8-Tin 1.0μm

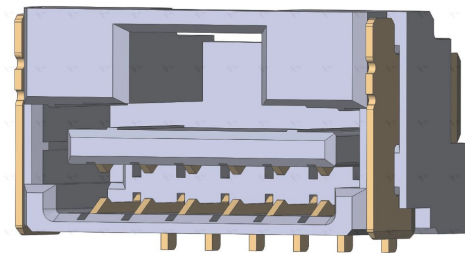

◆ SPECIFICATIONS

Rated Current:	1.0AMP
Rated Voltage:	50V AC
Insulation Resistance:	100MΩ Min.
Contact Resistance:	15mΩ Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-40℃ To +105℃
Insulator Material:	Natural Nylon
Terminal Material:	Copper Alloy
Terminal Plating:	Tin Plating On Contact Area
Durability:	30 Cycles
Packing:	Tape Reel

◆ DRAWING

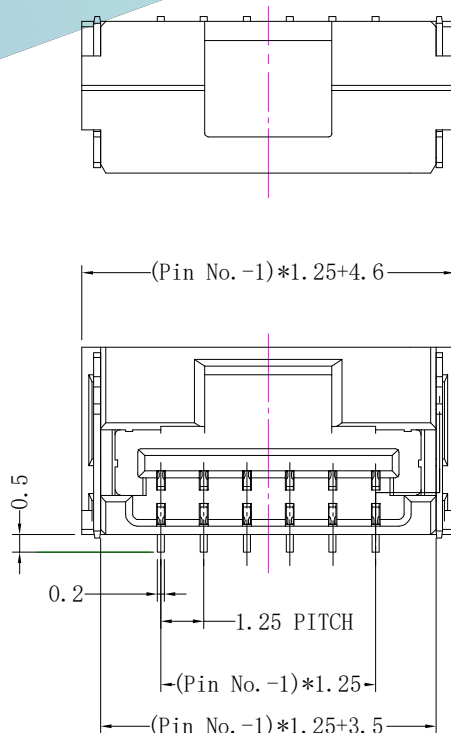

POWER CONN

◆ PART NO.

PW31 - X X X 3 1 0 R - 0103

Total Pins No.

2-4Pin

3-8Pin

:


7-10Pin

Plated:

3-0.75 μ m Au

7-0.38 μ m Au


8-Tin 2.0 μ m

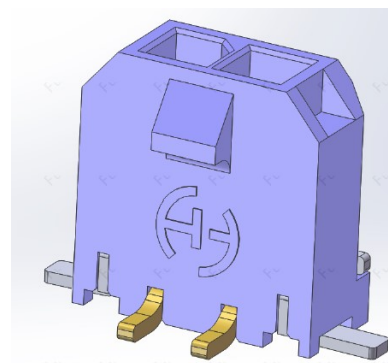

◆ SPECIFICATIONS

Rated Current:	5.0AMP
Rated Voltage:	500V DC
Insulation Resistance:	1000M Ω Min.
Contact Resistance:	10m Ω Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-40 $^{\circ}$ C To +105 $^{\circ}$ C
Insulator Material:	Heat-resisting Quality
Terminal Material:	Copper Alloy
Terminal Plating:	Tin Plating On Contact Area
Durability:	30 Cycles
Packing:	Tape Reel

◆ DRAWING

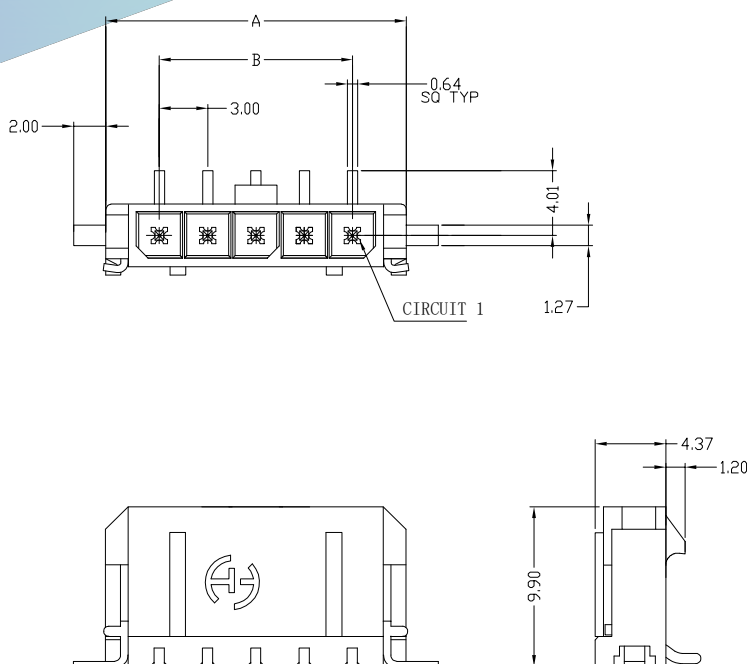

POWER CONN

◆ PART NO.

PW34 - X X X 3 1 0 T - 0123

Total Pins No.

2-4Pin

3-8Pin

:


7-10Pin

Plated:

3-0.75μm Au

7-0.38μm Au




8-Tin 2.0μm

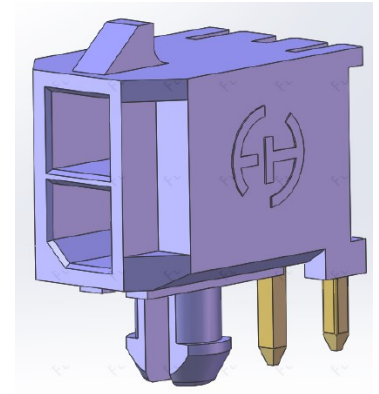

◆ SPECIFICATIONS

Rated Current:	5.0AMP
Rated Voltage:	500V DC
Insulation Resistance:	1000MΩ Min.
Contact Resistance:	10mΩ Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-40℃ To +105℃
Insulator Material:	Heat-resisting Quality
Terminal Material:	Copper Alloy
Terminal Plating:	Tin Plating On Contact Area
Durability:	30 Cycles
Packing:	Tary

◆ DRAWING



POWER CONN

◆ PART NO.

PW33 - X X X 3 1 0 R - 0124

Total Pins No.

2-4Pin

3-8Pin

:


7-10Pin

Plated:

3-0.75μm Au

7-0.38μm Au




8-Tin 2.0μm

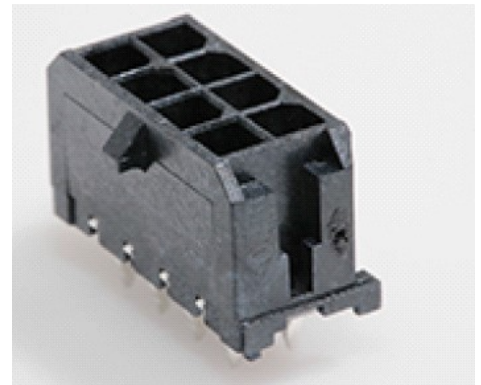

◆ SPECIFICATIONS

Rated Current:	5.0AMP
Rated Voltage:	500V DC
Insulation Resistance:	1000MΩ Min.
Contact Resistance:	10mΩ Max.
Withstand Voltage:	AC 500V
Operating Temperature:	-40℃ To +105℃
Insulator Material:	Heat-resisting Quality
Terminal Material:	Brass Alloy
Terminal Plating:	Tin Plating On Contact Area
Durability:	30 Cycles
Packing:	Tape Reel

◆ DRAWING





Tel: 0512-50139088-8060
Fax: 0512-57178483
[Http: //www.fuhaotech.com](http://www.fuhaotech.com)

地址：江苏省昆山市吴淞江工业园山淞路297号
Add: No. 297 ShanSong Road, Kun Shan, Jiangsu Province, China.

昆山富浩电子科技有限公司
Kunshan Fuhao Electronic Science and Technology CO.,LTD